



BIGFILLER (BIGF)

Specifications:

Voltage	400Volt 50z 3~+N+ PE (N. America 208/220V. 60Hz)
Power connection machine	16A 3 phase 5pin
Power	1,1kW
Length	4.130mm. (tow bar placed up)
Width	1.300mm.
Height	1.920mm.
Height soil bin edge	1.180mm.
Weight	±850kg
Height soil outlet	1.220mm.
Capacity soil bin	3.100 ltr 3m ³
Maintenance set	16A plug, 3x open end wrench 1x door key
Set of wheels	2x wheels (air) front unmovable 2x wheels (air) swivel
Tow bar height	Standard (height 450mm)
Controls machine	Start/stop/emergency stop and main switch

Options:	Code:	Specifications:
4 meter 5x1.5 cable incl. 16A plug	900965	
Continuous plug box	900966	
Soil bin extension	BIGFO	Height soil bin input 1.780mm 2.300Ltr 2,3m ³ extra
Foot switch	BIGFV	
Level control	NIVR1	Advise to place on the machine
Soil moistener	GDUG	Mounted on the outlet

Notes:

- The plate in the soil bin, above the swivel wheels (back side) can be removed.



Partner in Growing




Newsletter


SUBJECT: Big Filler

DATE: 25-2-11

To improve the soil guide to the elevator, from now on the new Javo Big Fillers will be standard delivered with insert plates mounted in the soil bin. There is a set of demountable insert plates available for the existing machines (art.nr.: 207-129-DEM).

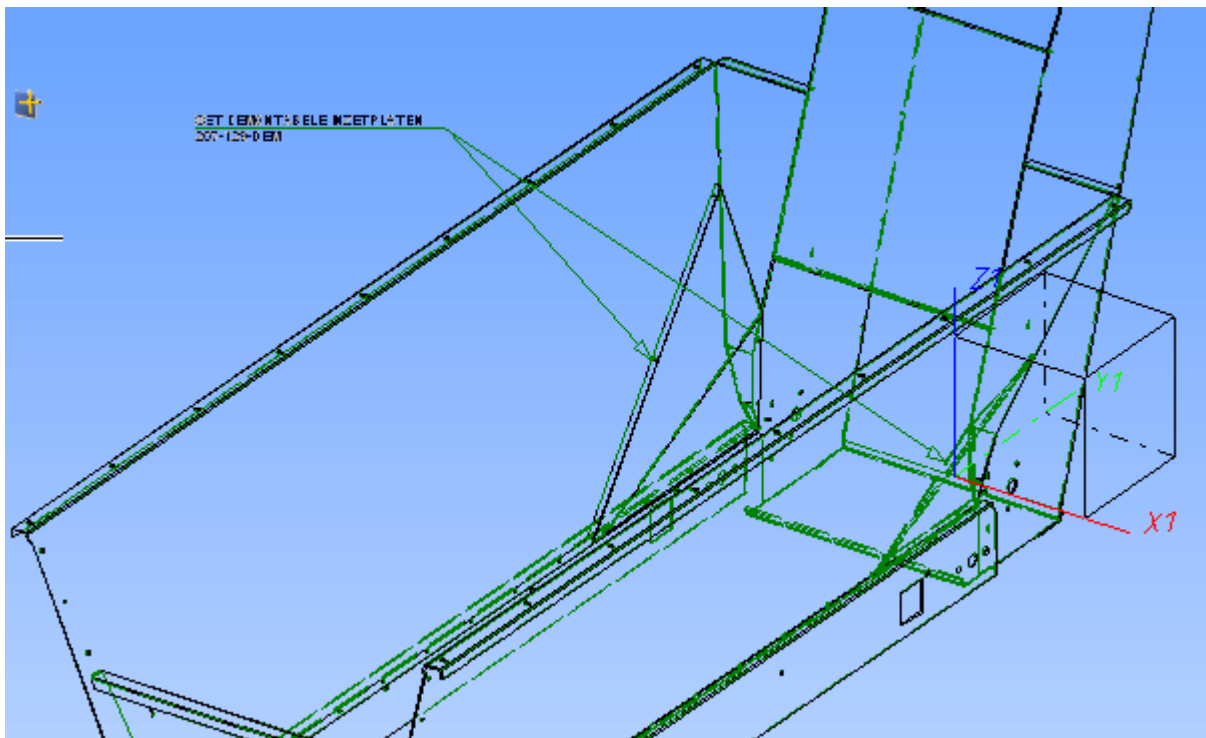

Oil quantities (ccm) variable-speed ball drive KR1-KR4

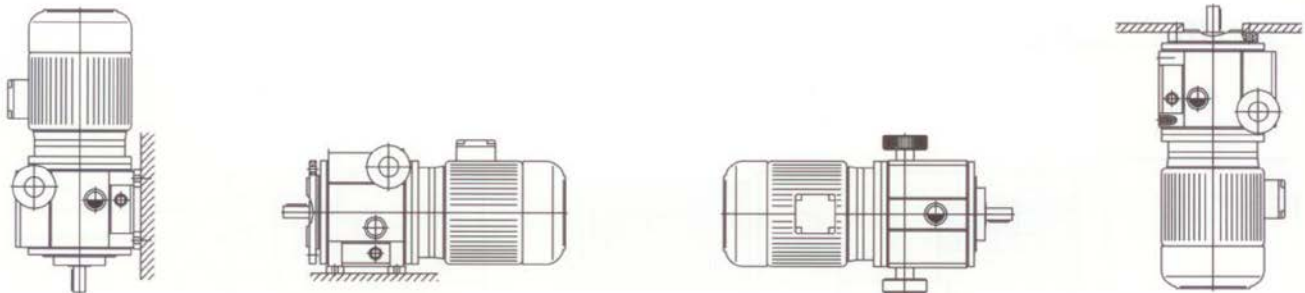

Einbaulage	V1, V5, V18	B3, B5, B14	B6, B7	V3, V6, V19
KR1	70	70	70	70
KR2	200	125	200	125
KR3	400	250	400	250
KR4	800	450	800	450

Only the use of Santotrac 50/Variotrac 32 synthetic traction fluid ensures full power transmission.

The warranty requires this oil type to be used. The oil should be changed after 5000 operating hours (at least once per year). The oil change must not be carried out during operation. No other maintenance work is required.

Oil quantities FMRV + FDL:

Drive:	Quantity (ltr):	Type:
FMRV030	0,05	BP Energol SG-XP320
FMRV040	0,1	BP Energol SG-XP320
FMRV050	0,15	BP Energol SG-XP320
FDL018	0,13 (aber in vertikal mit Wellenende nach unten: 0,2)	BP Autran DX
FDL037	0,15 (aber in vertikal mit Wellenende nach unten: 0,25)	BP Energol SG-XP320

Trädgårdsteknik AB
Helsingborgsvägen Varalöv
262 96 ÄNGELHOLM
Tel: 0431-22290
Fax: 0431-22270
Mail: info@[tradgardsteknik.se](mailto:info@tradgardsteknik.se)
Webb: www.tradgardsteknik.se