

SAP.B

AUTOMATIC PRINT AND APPLY LABELLING TO PNEUMATIC ARM SERIES "SAP.B"

MAIN FEATURES


- Carter applicator made entirely of stainless steel.
- **Label application by pneumatic arm**, application plate in sizable sponge for labels up to 110x200 mm.
- Print width: 2", 3", 4".
- Print speed: 300 mm/s.
- Print mode: direct thermal (optional thermal transfer).
- Resolution: 200 dpi (300 dpi optional).
- Predisposition for fixing to the arm movement.
- Photocell detection product for the activation of the cycle pose.
- Communication ports: RS232 serial port, USB.
- Roll size, outer diameter: 220 mm max, internal diameter: 45 mm.
- Power supply voltage: 220/240 Vac; 50-60 Hz, on request: 110 Vac.

OPTIONS ON REQUEST

- Positioner column entirely in stainless steel, horizontal and vertical movement on bearings.
- Pedestal for positioning the column entirely stainless steel complete with stainless steel leveling feet.

INTERFACE ON REQUEST

- Ethernet/Wi-Fi.

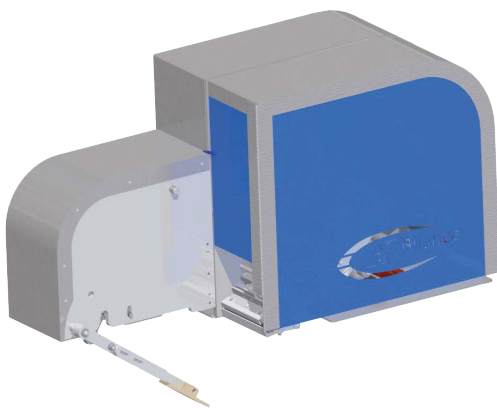

STAINLESS
STEEL



Postadress:

TRÄDGÅRDSTEKNIK AB
Helsingborgsvägen 578, Varalöv
262 96 ÄNGELHOLM

Telefon : 0431-222 90
Bg.nr : 5743-7980
Org.nr : 556409-6120

URL:

www.tradgardsteknik.se
E-postadress:
info@tradgardsteknik.se