

# Air consumption cylinders/machines

## Air consum. cylinders measured at 3.000 strokes p/h at 6 atm. (90psi)

Length Cylinder	Diameter 12	Diameter 20	Diameter 32	Diameter 40
300mm			156 NL/minute	243 NL/minute
250mm			130 NL/minute	202,5 NL/minute
200mm			104 NL/minute	
150mm			78 NL/minute	
100mm		20,5 NL/minute	52 NL/minute	
70mm		14,35 NL/minute		
50mm		10,25 NL/minute		
20mm	1,38 NL/minute	4,1 NL/minute		
16mm	1,1 NL/minute	3,3 NL/minute		
12mm	0,83 NL/minute	2,5 NL/minute		

## Air consumption in NL/minute per item

Machine	Measured speed	NL/minute
POP pot dispenser	3000 strokes per hour	10,25
LPO large pot dispenser	3000 strokes per hour	39,75
Osmocote dispenser*	1500 strokes per hour	52
Blowers continuous**	N.a.	262
Blowers per stroke	3000 strokes per hour	56,50
Placing robot NZ0-1 + staggering***	500 strokes per hour	83,50
Pick-up robot NZ100 + staggering***	500 strokes per hour	4,3
Compact pick-up NZL100	500 strokes per hour	
Compact placing NZL0-1	500 strokes per hour	
Linea Recta pick-up NZLR100	500 strokes per hour	
Linea Recta placing NZLR0-1	500 strokes per hour	

### Notes:

**NL = Nominal Liter p. m. x 0.264= gallon p.m. (GPM) : 7.48 = Cubic feet p. m. (CFM)**

- Air consumption for a potting machine measured at 3,000 strokes per hour with a LPOD, AFLPR1, AFLA1 = 250 NL/minute (8.8 CFM)

- Intake capacity is mentioned in NL/minute.

\*The inner cylinder is adjusted at 2cm. (¾")

\*\* Not reduced, with a 2mm (3/32") blower opening

\*\*\* Staggering stroke at 100mm. (4")



## Javo Economic (ECON)

### Specifications:

Voltage	400Volt 50z 3~+N+ PE (N. America 208/220V. 60Hz)
Power connection machine	16A 3 phase 5 pin
Power	1,85 kW
Switched plug box	1x 16A 3 phase 5 pin
Length	2980mm.
Width	1100mm(frame) 1250mm(met PO)
Height	1700mm
Weight	550kg
Height take off belt	±905mm (35")
Max. capacity	2.600p.p./hour
Min. capacity	1.320p.p./hour
Min. Pot size	8cm (3¼")
Max. pot size*	21cm
Amount pot holders	8
Volume soil bin	±700 litre
Maintenance set	16A plug, 3x open end wrench, 1xdoor key, 1x allen wrench
Drill holder (motor shaft 19mm)	Drill shaft 14mm (up to drill 15cm)
Pot dispenser	1x mechanical PO
Take off	1x mechanical (cannot be moved)
Take off side	Left, Right and Front side possible (incl. supports)
Take off belt	1x 3m 150mm (10'x6") vario with smooth surface (no WCD)
Conveyor belt support	TRBS

<b>Options:</b>	<b>Code:</b>	<b>Specifications:</b>
4mtr 5x1.5 cable incl. 16A plug	900965	
Continuous plug box	900966	Not standard
Soil bin extension	286-144-01	Max 1m <sup>3</sup> 600KG



*Partner in Growing*




## *Newsletter*

ONDERWERP: Door at drill Economic


DATE: 14-4-2011

NIEUWSBRIEF NR.: 286-150411

Starting with machine # 28600092 the door at the drill of the Economic has been changed. The door has become more compact which allows the door switch to fit better in the lock. The door also does not scrape over the machine frame anymore.

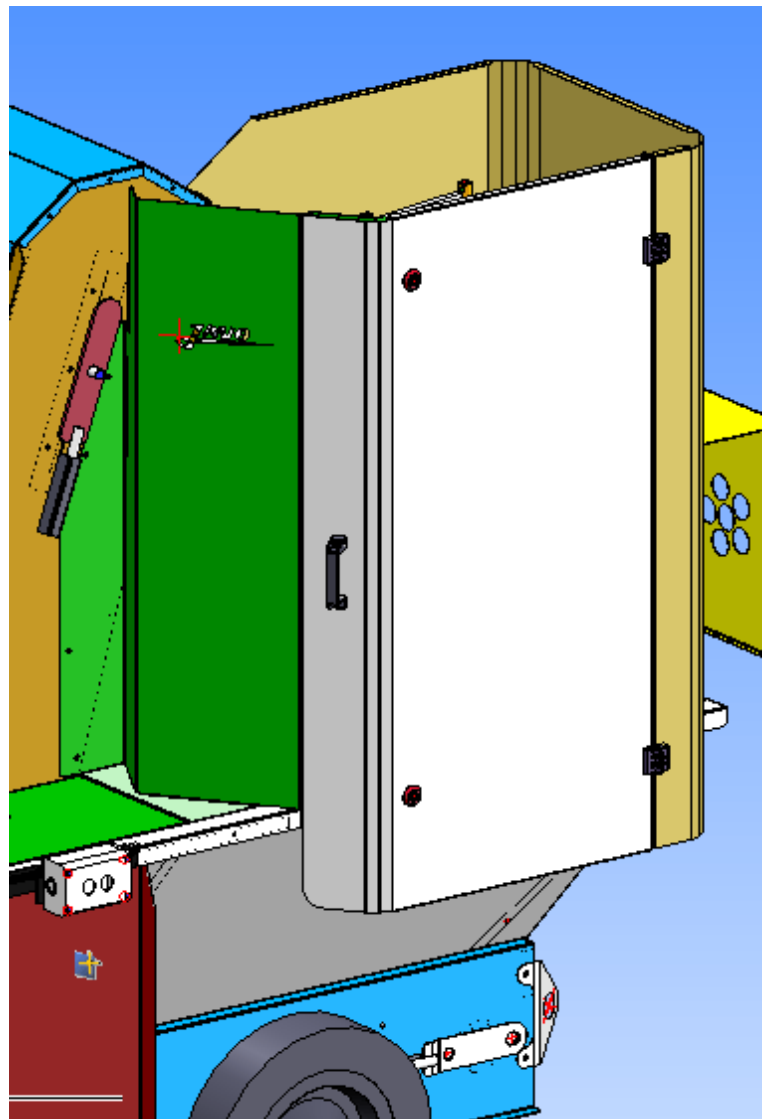

## Oil quantities (ccm) variable-speed ball drive KR1-KR4

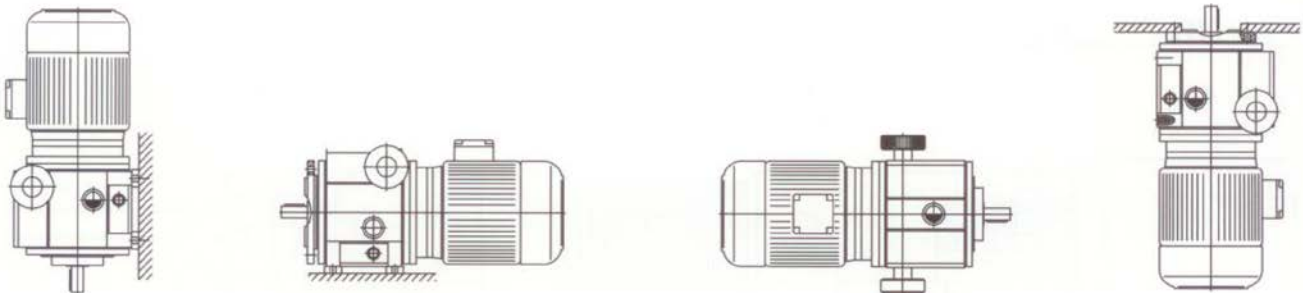

Einbaulage	V1, V5, V18	B3, B5, B14	B6, B7	V3, V6, V19
KR1	70	70	70	70
KR2	200	125	200	125
KR3	400	250	400	250
KR4	800	450	800	450

*Only the use of Santotrac 50/Variotrac 32 synthetic traction fluid ensures full power transmission.*

*The warranty requires this oil type to be used. The oil should be changed after 5000 operating hours (at least once per year). The oil change must not be carried out during operation. No other maintenance work is required.*

## Oil quantities FMRV + FDL:

Drive:	Quantity (ltr):	Type:
FMRV030	0,05	BP Energol SG-XP320
FMRV040	0,1	BP Energol SG-XP320
FMRV050	0,15	BP Energol SG-XP320
FDL018	0,13 (aber in vertikal mit Wellenende nach unten: 0,2)	BP Autran DX
FDL037	0,15 (aber in vertikal mit Wellenende nach unten: 0,25)	BP Energol SG-XP320

Trädgårdsteknik AB  
Helsingborgsvägen Varalöv  
262 96 ÄNGELHOLM  
Tel: 0431-22290  
Fax: 0431-22270  
Mail: info@[tradgardsteknik.se](mailto:info@tradgardsteknik.se)  
Webb: [www.tradgardsteknik.se](http://www.tradgardsteknik.se)