



NIBE F1145-12 + VPB300



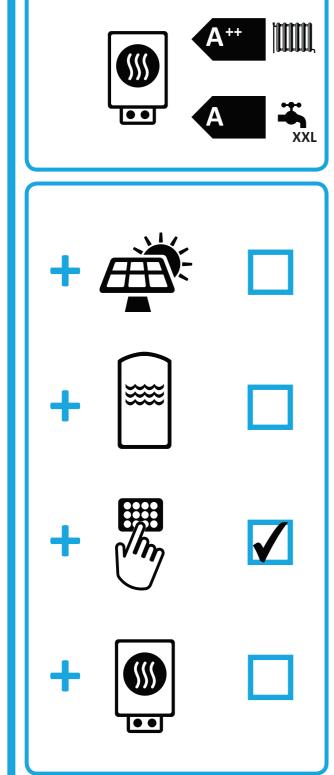

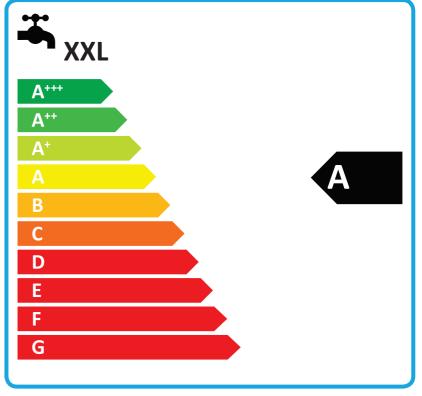

Model:	NIBE F1145-		
Temperature application	35	55	°C
Declared load profile for water heating	XXL		
Seasonal space heating energy efficiency class, average climate:	A+++	A++	
Water heating energy efficiency class, average climate:			
Rated heat output, average climate:	14	14	kW
Annual energy consumption for space heating, average climate	6042	7785	kWh
Annual electricity consumption for water heating, average climate	2121		kWh
Seasonal space heating energy efficiency, average climate:	183	141	%
Water heating energy efficiency, average climate:	1	%	
Sound power level LWA indoors	4	dB	
Rated heat output, cold climate:	14	14	kW
Rated heat output, warm climate:	14	14	kW
Annual energy consumption for space heating, cold climate	6993	9049	kWh
Annual electricity consumption for water heating, cold climate	2121		kWh
Annual energy consumption for space heating, warm climate	3949	5120	kWh
Annual electricity consumption for water heating, warm climate	2121		kWh
Seasonal space heating energy efficiency, cold climate:	189	145	%
Water heating energy efficiency, cold climate:	102		%
Seasonal space heating energy efficiency, warm climate:	181	138	%
Water heating energy efficiency, warm climate:	1	%	
Sound power level LWA outdoors		-	dB

Data for package fiche

Controller class	V		
Controler contribution to efficiency	3	%	
Seasonal space heating energy efficiency of package, average climate:	187	144	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A++	%
Seasonal space heating energy efficiency of package, cold climate:	193	148	%
Seasonal space heating energy efficiency of package, warm climate:	185	142	%

Model(s):			NIBE F1	145-12 (+VPB 300)			
Type of heat source/sink:		Bri		ine-to-water			
Low-temperature heat pump:				No			
Equipped with supplementary heater:				Yes			
Heat pump combination heater:				Yes			
Climate condition:				Average			
Temperature application:	emperature application: Medium		temperature (55 °C)				
Applied standards: EN14825 and EN16147	•						
				Seasonal space heating energy			
Rated heat output	Prated	14,0	kW	efficiency	η_{s}	141	%
Declared capacity for part load at outdoor temperature Tj				Declared coefficient of performance for part load at outdoor temperature Tj			
Tj = -7 °C	Pdh	10,8	kW	Tj = -7 °C	COPd	3,30	-
Tj = +2 °C	Pdh	11,1	kW	Tj = +2 °C	COPd	3,80	-
Tj = +7 °C	Pdh	11,3	kW	Tj = +7 °C	COPd	4,10	-
Tj = +12 °C	Pdh	11,5	kW	Tj = +12 °C	COPd	4,40	-
Tj = biv	Pdh	10,9	kW	Tj = biv	COPd	3,46	-
Tj = TOL	Pdh	10,7	kW	Tj = TOL	COPd	3,12	-
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd		-
Bivalent temperature	T _{biv}	-4,2	°C	Operation limit temperature	TOL	-10	°C
		-4,2		Cycling interval efficiency		-10	C
Cycling interval capacity for heating Degradation co-efficient	Pcych Cdh	0,99	kW	Heating water operating limit	COPcyc WTOL	65	°C
Degradation co-enicient	Cuii	0,99	_	neating water operating innit	WIOL	03	C
Power consumption in modes other than active mode		Supplementary heater					
Off mode	P_{OFF}	0,002	kW	Rated heat output	Psup	3,3	kW
Thermostat-off mode	P _{TO}	0,018	kW				
Standby mode	P_{SB}	0,007	kW	Type of energy input Electric			
Crankcase heater mode	P_{CK}	0,03	kW				
Other items							
Capacity control		fixed		Rated air flow rate, outdoors			m³/h
				Rated water flow rate, indoor heat			
Sound power level, indoors/outdoors	L_{WA}	45/-	dB	exchanger		1,15	m³/h
				Rated brine or water flow rate,			m3/h
Annual energy consumption	Q_{HE}	7785	kWh	outdoor heat exchanger		2,18	m³/h
For heat pump combination heater:							
Declared load profile		XXL		Water heating energy efficiency	η_{wh}	102	%
					IWII		
Daily electricity consumption	Q _{elec}	9,66	kWh	Daily fuel consumption	Q_{fuel}		kWh
Annual electricity consumption	AEC	2121	kWh	Annual fuel consumption	AFC		GJ